



E S E D R A

fine porcelain stoneware

★★★★★
NAXOS®
FINCIBEC GROUP

ESEDRA

- DELFI -

12X12 WALL/FLOOR | N1212ED



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(13 PCS PER CTN) 48.50 LBS/CTN 12.60 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

12X24 WALL/FLOOR | N1224ED



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(6 PCS PER CTN) 50.0 LBS/CTN 11.70 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

3X12 WALL/FLOOR | N312ED



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(46 PCS PER CTN) 45.20 LBS/CTN 10.84 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

2X2 MOSAIC | N22ED



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SHEET ONLY

WEAR RATING: 5 | VARIATION: 3

3X12 BULLNOSE | N312EBND



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE PIECE ONLY

WEAR RATING: 5 | VARIATION: 3



OUR **ESEDRA** LINE CAN BE FOUND IN
THE **NAXOS** SECTION OF THE PRICE BOOK.



ESEDRA

- EFESO -

12X12 WALL/FLOOR | N1212EE



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(13 PCS PER CTN) 48.50 LBS/CTN 12.60 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

12X24 WALL/FLOOR | N1224EE



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(6 PCS PER CTN) 50.0 LBS/CTN 11.70 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

3X12 WALL/FLOOR | N312EE



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(46 PCS PER CTN) 45.20 LBS/CTN 10.84 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

2X2 MOSAIC | N22EE



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SHEET ONLY

WEAR RATING: 5 | VARIATION: 3

3X12 BULLNOSE | N312EBNE



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE PIECE ONLY

WEAR RATING: 5 | VARIATION: 3



OUR **ESEDRA** LINE CAN BE FOUND IN
THE **NAXOS** SECTION OF THE PRICE BOOK.



ESEDRA

- OLIMPIA -

12X12 WALL/FLOOR | N1212EO



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(13 PCS PER CTN) 48.50 LBS/CTN 12.60 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

12X24 WALL/FLOOR | N1224EO



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(6 PCS PER CTN) 50.0 LBS/CTN 11.70 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

3X12 WALL/FLOOR | N312EO



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(46 PCS PER CTN) 45.20 LBS/CTN 10.84 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

2X2 MOSAIC | N22EO



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SHEET ONLY

WEAR RATING: 5 | VARIATION: 3

3X12 BULLNOSE | N312EBNO



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE PIECE ONLY

WEAR RATING: 5 | VARIATION: 3



OUR **ESEDRA** LINE CAN BE FOUND IN
THE **NAXOS** SECTION OF THE PRICE BOOK.



ESEDRA

- PERGAMO -

12X12 WALL/FLOOR | N1212EP



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(13 PCS PER CTN) 48.50 LBS/CTN 12.60 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

12X24 WALL/FLOOR | N1224EP



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(6 PCS PER CTN) 50.0 LBS/CTN 11.70 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

3X12 WALL/FLOOR | N312EP



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SQUARE FOOT ONLY

(46 PCS PER CTN) 45.20 LBS/CTN 10.84 SF/CTN

WEAR RATING: 5 | VARIATION: 3 | DCOF $\geq$ 0.42

2X2 MOSAIC | N22EP



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE SHEET ONLY

WEAR RATING: 5 | VARIATION: 3

3X12 BULLNOSE | N312EBNP



PORCELAIN GLAZED & FROST PROOF

SOLD BY THE PIECE ONLY


WEAR RATING: 5 | VARIATION: 3





OUR **ESEDRA** LINE CAN BE FOUND IN
THE **NAXOS** SECTION OF THE PRICE BOOK.






How to lay

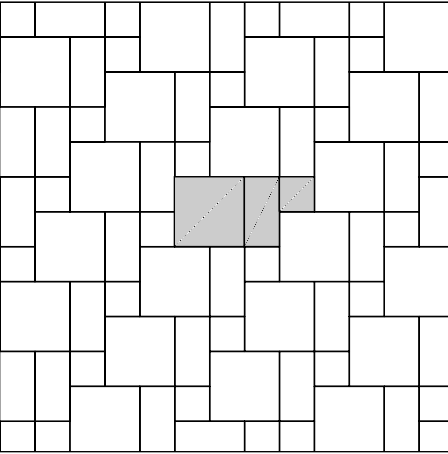

	60x60	57,1%
	30x60	28,6%
	30x30	14,3%

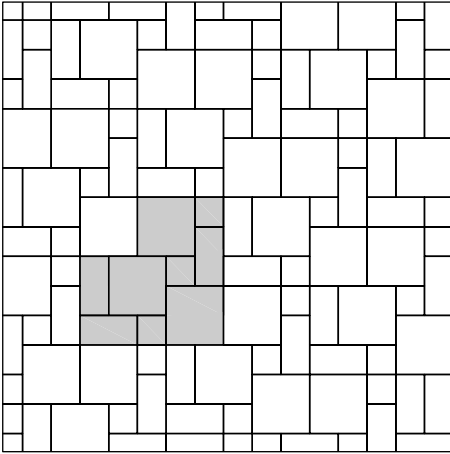


	60x60	57,1%
	30x60	28,6%
	30x30	14,3%

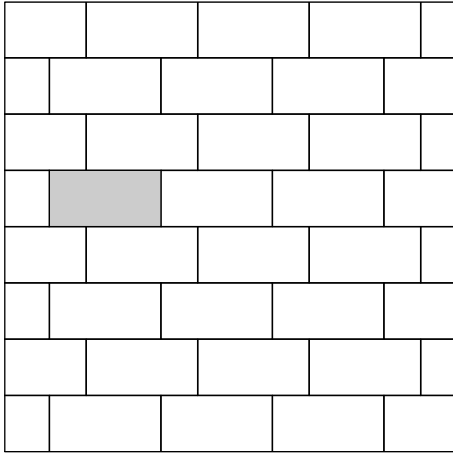


	50x100	100%
---	--------	------

It is necessary to take the tiles from several different boxes when laying them.


Color variations




V1
Even appearance



V3
Medium variation



V2
Light variation



V4
Strong variation

Use categories



Floor tiles recommended for low traffic areas.



Floor tiles recommended for medium traffic areas.



Floor tiles recommended for light traffic areas.



Floor tiles recommended for medium-light traffic areas.

Packaging

	60x60 cm 24"x24"	50x100 cm 10"x39"	50x100 cm 20 mm 10"x39"	30x60 cm 12"x24"	30x30 12"x12"	30x30 cm Mosaico 12"x12" Mosaic	7,3x30 cm Mattoncino 3"x12"
Pc.	3	2	1	6	13	11	46
M²	1,08	1	0,5	1,08	1,17	1	1,007
Kg	23	21	22,5	22,50	24	20,3	20,5

	60x60 cm 24"x24"	50x100 cm 10"x39"	50x100 cm 20 mm 10"x39"	30x60 cm 12"x24"	30x30 12"x12"	30x30 cm Mosaico 12"x12" Mosaic	7,3x30 cm Mattoncino 3"x12"
Colli Boxs	40	35	42	48	36	50	60
M²	43,2	35	21	51,84	36	58,5	60,42
Kg	920	735	945	1080	730,8	1200	1230

CARATTERISTICHE TECNICHE / GRES FINE PORCELLANATO
TECHNICAL SPECIFICATIONS / PORCELAIN STONEWARE
STANDARDS : UNI EN 14411 ANNEX G - Bla / UNI EN ISO 13006 ANNEX G - Bla

CARATTERISTICHE TECNICHE TECHNICAL DATA TECHNISCHE DATEN CARACTERÍSTICAS TÉCNICAS ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ			TIPO DI PROVA STANDARD OF TEST NORME D'UN TEST TESTNORM TIPO DE PRUEBA ТИП ТЕСТА	VALORI PRESCRITTI DALLE NORME INTERNATIONAL STANDARDS INTERNATIONALE NORMENWERTE VALEURS PRÉVUES PAR LES NORMES VALORES PREVISTOS POR LAS NORMAS ПРЕДЪОМОНЕННЪЕ СТАНДАРТОМ			VALORE MEDIO NAXOS NAXOS AVERAGE VALUE NAXOS MITTELWERT VALEURS MOYEN NAXOS VALOR MEDIO NAXOS ОРЕДНЕ ЗНАЧЕНИЯ NAXOS		
CARATTERISTICHE DIMENSIONALI - SIZE CHARACTERISTICS - MASSEIGENSCHAFTEN - DETERMINATION DES CARACTERISTIQUES DIMENSIONELLES CARACTERÍSTICAS DIMENSIONALES - РАЗМЕРНЫЕ ХАРАКТЕРИСТИКИ				REQUIREMENTS FOR NOMINAL SIZE N			NAT	GRIP	
				7 cm ≤ N < 15 cm	N ≥ 15 cm				
				mm	%	mm			
	LATI SIDES – SEITEN COTES - CANTOS РАЗМЕРЫ СТОРОН	FOR NON-RECTIFIED TILES		EN ISO 10545-2	±0,9	±0,6	±2,0	CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME ООТВЕТСТВУЕТ	
	FOR RECTIFIED TILES		±0,4		±0,3	±1,0			
	SPESORE THICKNESS - DICKE ÉPAISSEUR - ESPESOR ТОЛЩИНА		EN ISO 10545-2		±0,5	±5,0	±0,5	CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME ООТВЕТСТВУЕТ	
	RETTILINEITÀ DEGLI SPIGOLI STRAIGHTNESS OF SIDES - GERADLINIGKEIT DER KANTEN RECTITUDE DES ARÊTES - RECTIDUD DE LOS CANTOS - КООРДИНАТНОСТЬ	FOR NON-RECTIFIED TILES		EN ISO 10545-2	±0,8	±0,5	±1,5	CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME ООТВЕТСТВУЕТ	
		FOR RECTIFIED TILES			±0,4	±0,3	±0,8		
	ORTOGONALITÀ RECTANGULARITY - RECHTWINKLIGKEIT PERPENDICULARITÉ - ORTOGONALIDAD КРЯВИЗНА СТОРОН	FOR NON-RECTIFIED TILES		EN ISO 10545-2	±0,8	±0,5	±2,0	CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME ООТВЕТСТВУЕТ	
		FOR RECTIFIED TILES			±0,4	±0,3	±1,5		
	PLANARITÀ SURFACE FLATNESS – EBENFLÄCHIGKEIT PLANEITE DE SURFACE - PLANEDAD КРЯВИЗНА ПОВЕРХНОСТИ	CENTRE CURVATURE	FOR NON-RECTIFIED TILES	EN ISO 10545-2	±0,8	±0,5	±2,0	CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME ООТВЕТСТВУЕТ	
			FOR RECTIFIED TILES		±0,6	±0,4	±1,8		
		EDGE CURVATURE	FOR NON-RECTIFIED TILES		±0,8	±0,5	±2,0		
			FOR RECTIFIED TILES		±0,6	±0,4	±1,8		
		WARPAGE	FOR NON-RECTIFIED TILES		±0,8	±0,5	±2,0		
			FOR RECTIFIED TILES		±0,6	±0,4	±1,8		
	ASSORBIMENTO D'ACQUA WATER ABSORPTION - WASSERAUFNAHME ABSORPTION D'EAU - ABSORCIÓN DE AGUA ВОДОПОГЛОЩЕНИЕ		EN ISO 10545-3		≤ 0,5%			≤ 0,1%	
	RESISTENZA ALLA FLESSIONE FLEXION RESISTANCE - BIEGEFESTIGKEIT RESISTANCE A LA FLEXION - RESISTENCIA A LA FLEXIÓN ПРЕДЕЛ ПРОЧНОСТИ ПРИ ИЗГИБЕ		EN ISO 10545-4	S ≥ 700 N  < 7,5 mm			CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME ООТВЕТСТВУЕТ		
				S ≥ 1.300 N  ≥ 7,5 mm					
				R ≥ 35 N/mm					
	RESISTENZA ALL'URTO IMPACT RESISTANCE - STOSSEFESTIGKEIT RESISTANCE AUX CHOCES - RESISTENCIA A LOS GOLPES УДАРНОСТОЙКОСТЬ		EN ISO 10545-5		VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ			> 0,80	
	COEFFICIENTE DI DILATAZIONE TERMICA LINEARE COEFFICIENT OF LINEAR THERMAL EXPANSION - LINEARER WÄRMEAUDEHNUNGSKOEFFIZIENT COEFFICIENT DE DILATION THERMIQUE LINEAIRE - COEFFICIENT DE DILATACIÓN TÉRMICA LINEAL КОЭФФИЦИЕНТ ЛИНЕЙНОГО ТЕРМИЧЕСКОГО РАСТЯЖЕНИЯ		EN ISO 10545-8		VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ			α = 6,7x10 ⁻⁶ /°C°	
	RESISTENZA AGLI SBALZI TERMICI RESISTANCE TO THERMAL SHOCKS - BESTÄNDIGKEIT GEGEN TEMPERATURSCHWANKUNGEN RESISTANCE AUX CHOCES THERMIQUES - RESISTENCIA A LOS CHOQUES TÉRMICOS СТОЙКОСТЬ К ПЕРЕПАДАМ ТЕМПЕРАТУРЫ		EN ISO 10545-9		TEST SUPERATO SECONDO EN ISO 10545-1 TEST PASSED ACCORDING TO - TEST BESTANDEN NACH TEXTE DÉPASSÉ SELON - PRUEBA SUPERADA SEGÚN ИСПЫТАНИЕ ПРОЙДЕНО В СООТВЕТСТВИИ С			NESSUN DANNO NO DAMAGE - KEIN SCHADEN AUCUN DOMMAGE - NINGUN DAÑO БЕЗ ПОВРЕЖДЕНИЙ	
	DILATAZIONE ALL'UMIDITÀ (IN MMM) MOISTURE EXPANSION (IN MMM) - FEUCHTIGKEITSBEDINGTE AUSDEHNUNG (IN MMM) DILATATION À L'HUMIDITÉ (EN MMM) - DILATACIÓN CON LA HUMEDAD (EN MMM) ВЛАЖНОСТНОЕ РАСТЯЖЕНИЕ (В MMM)		EN ISO 10545-10		VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ			MAX 0,1 mm / m	
	RESISTENZA AL GELO FROST RESISTANCE - FROSTBESTÄNDIGKEIT RESISTANCE AU GEL - RESISTENCIA AL HIELO МОРОЗОСТОЙКОСТЬ		EN ISO 10545-12		TEST SUPERATO SECONDO EN ISO 10545-1 TEST PASSED ACCORDING TO - TEST BESTANDEN NACH TEXTE DÉPASSÉ SELON - PRUEBA SUPERADA SEGÚN ИСПЫТАНИЕ ПРОЙДЕНО В СООТВЕТСТВИИ С			NESSUN DANNO NO DAMAGE - KEIN SCHADEN AUCUN DOMMAGE - NINGUN DAÑO БЕЗ ПОВРЕЖДЕНИЙ	
	RESISTENZA AI PRODOTTI CHIMICI USO DOMESTICO E ADDITIVI PER PISCINA RESISTANCE TO HOUSEHOLD AND SWIMMING POOL CHEMICAL PRODUCTS - REBESTÄNDIGKEIT GEGEN HAUSHALTS- UND SWIMMING POOL ZUSATZSTOFFE FÜR SWIMMING POOLS - RESISTANCE AUX PRODUITS CHIMIQUES USAGE DOMESTIQUE ET ADDITIFS POUR PISCINE - RESISTENCIA A LOS PRODUCTOS QUÍMICOS DE USO DOMÉSTICO Y ADITIVOS PARA PISCINA - СТОЙКОСТЬ К ДЕЙСТВИЮ БЫТОВЫХ ХИМИЧЕСКИХ СРЕДСТВ, ДОБАВКИ В БАССЕЙНЫ		EN ISO 10545-13		B MIN			CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME ООТВЕТСТВУЕТ	
	RESISTENZA A BASSE CONCENTRAZIONI DI ACIDI E ALCALI RESISTANCE TO LOW CONCENTRATIONS OF ACIDS AND ALKALI - BESTÄNDIGKEIT BEI NIEDRIGEN KONZENTRATIONEN VON SÄUREN UND LAUGEN - RESISTANCE À BASSES CONCENTRATIONS D'ACIDES ET ALCALIS - RESISTENCIA A BAJAS CONCENTRACIONES DE ÁCIDOS Y ALCALIS - СТОЙКОСТЬ К ДЕЙСТВИЮ НИЗКИХ КОНЦЕНТРАЦИЙ КИСЛОТ И ЩЕЛОЧЕЙ		EN ISO 10545-13		VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ			CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME ООТВЕТСТВУЕТ	
	RESISTENZA AD ALTE CONCENTRAZIONI DI ACIDI E ALCALI RESISTANCE TO HIGH CONCENTRATIONS OF ACIDS AND ALKALI - BESTÄNDIGKEIT BEI HOHEN KONZENTRATIONEN VON SÄUREN UND LAUGEN - RESISTANCE À HAUTES CONCENTRATIONS D'ACIDES ET ALCALIS - RESISTENCIA A ALTAS CONCENTRACIONES DE ÁCIDOS Y ALCALIS - СТОЙКОСТЬ К ДЕЙСТВИЮ ВЫСОКИХ КОНЦЕНТРАЦИЙ КИСЛОТ И ЩЕЛОЧЕЙ		EN ISO 10545-13		VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ			CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME ООТВЕТСТВУЕТ	
	RESISTENZA ALLE MACCHIE RESISTANCE TO STAINS - FLECKENBESTÄNDIGKEIT RESISTANCE AUX TACHES - RESISTENCIA A LAS MANCHAS УСТОЙЧИВОСТЬ К ПЯТНООБРАЗОВАНИЮ		EN ISO 10545-14		CLASSE 3 MIN			CONFORME COMPLYING - ERFÜLLT CONFORME - CONFORME ООТВЕТСТВУЕТ	
	CESSIONE DI PIOMBO E CADMIO LEAD AND CADMIUM DISCHARGE - ABGABE VON BLEI UND CADMIUM PERTE DE PLOMB ET CADMIUM - CESIÓN DE PLOMO Y CADMIO ВЫДЕЛЕНИЕ СВИНЦА И КАДМИЯ		EN ISO 10545-15		VALORE DICHIARATO DECLARED VALUE - ANGEGEBENER WERT VALEUR DÉCLARÉE - VALOR DECLARADO - ЗАЯВЛЕННОЕ ЗНАЧЕНИЕ			< ALIMITE DI RILEVAMENTO < THAN INSTRUMENT LIMIT < UNMESSBARES WERT < LIMITE DE L'INSTRUMENT < LIMITE DEL INSTRUMENTO < «А ПРЕДЕЛ ОПРЕДЕЛИМОСТИ	
	SCIVOLOSITÀ SKID RESISTANCE - RUTSCHWERT GLISSANCE - ADHERENCIA СКОЛЬЗКОСТЬ		DM. 238/89 BCRA		> 0,40		> 0,40	> 0,40	
			ANSI A 137.1		WET DCOF > 0,42		> 0,42	> 0,42	
			DIN 51130		-		R9	R11	
			DIN 51097		-		A+B MOSAICO	A+B+C	