

Saten, *Glazed Porcelain.*

Iconic, high contrast surfaces that inspire a sense of fresh minimalism.






Saten, *Black*




13"x13" Pressed Matte
BFC1313SB

Saten, *White*

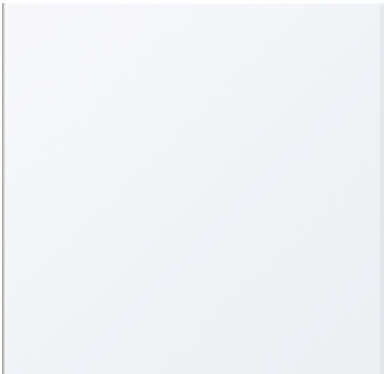

13"x13" Pressed Matte
BFC1313SWH

Saten, *Variation*

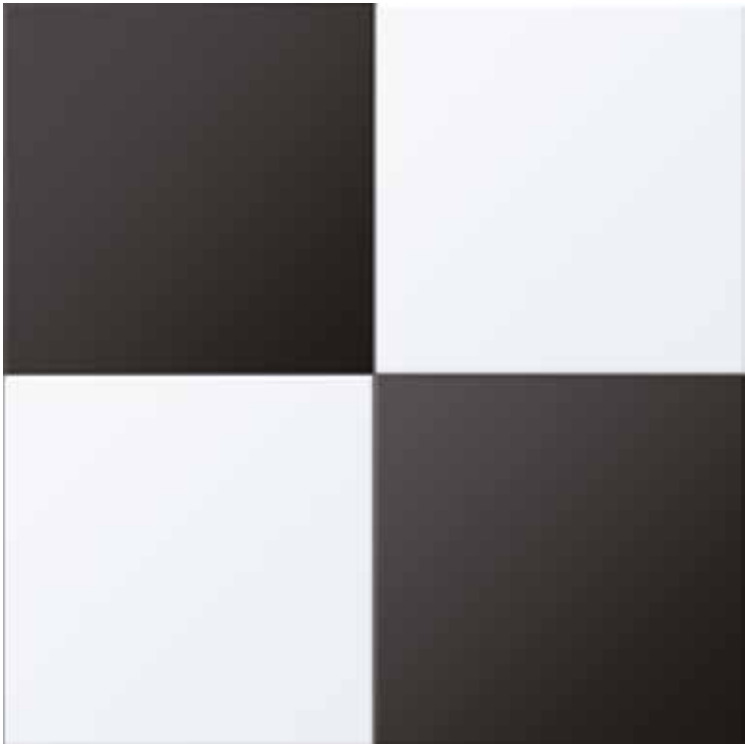










Packaging information

Key logistical details including item codes and product specifications.

Satin Product & Packaging Information Glazed Porcelain												
	ACTUAL DIMENSIONS	THICKNESS	BLACK ITEM CODE	WHITE ITEM CODE	LBS BOX	KGS BOX	PCS BOX	SQFT BOX	M² BOX	BXS SKID	SQFT SKID	M² SKID
13 x 13 in / 33 x 33 cm MATTE PRESSED GLAZED PORCELAIN TILE	330 x 330 mm	7.6 mm	4000-0144-0	4000-0145-0	40.75	18.48	11	12.92	1.2	58	749.36	69.60

Technical information

Tile collection performance based on industry standards.

Technical Information Glazed Porcelain				MATTE
	WATER ABSORPTION	ANSI / ISO - (%)	≤ 0.5%	
	ABRASION RESISTANCE	ANSI / ISO	CLASS 3	
	SCRATCH HARDNESS	ANSI / ISO - (Mohs)	6	
	BREAKING STRENGTH	ANSI - (lbf) ISO - (N)	≥ 300 ≥ 1300	
	SHADE VARIATION		V1	
	SLIP RESISTANCE	ANSI - DCOF (WET) ISO - R VALUE	MATTE ≥0.42 (ID, IW) MATTE R (-)	
	CHEMICAL RESISTANCE	ANSI / ISO	CLASS B	
	STAIN RESISTANCE	ANSI ISO	CLASS A	
	FROST RESISTANCE	ANSI / ISO	PASS	

Test values are based on ANSI / ISO standards according to: ANSI A137.1 - Porcelain tile P1 Class, ISO 13006 - G - Bia Group, En 14411 - G - Bia Group.
Variances in test values can occur in different production lots.

Usage recommendations

Anatolia’s recommendations for suitable applications.

Usage Recommendations*				MATTE GLAZED PORCELAIN
APPLICATION		WALL	FLOOR	
INTERIOR	RESIDENTIAL	•	ID, IW	
	COMMERCIAL	•	ID, IW	
	HEAVY COMMERCIAL	•		
EXTERIOR	RESIDENTIAL / COMMERCIAL	•		

* These recommendations are not defined by ANSI/ISO standards.

DCOF Classifications per ANSI A326.3: (ID): Interior, Dry (IW): Interior, Wet (IW+): Interior, Wet Plus (EW): Exterior, Wet (O/G): Oils/Greases

* Factors other than the noted DCOF result must also be taken into consideration. Such factors include, but are not limited to, expected contaminants, drainage, surface texture, effect of structure on the DCOF measurement, number of grout joints, traction-enhancing features, and intended use in addition to the other criteria noted in standard ANSI A326.3