

Lumino, *Glazed Porcelain.*


A journey through refined elegance, artistry, and timeless natural stone designs.



Colors at a glance



Calacatta

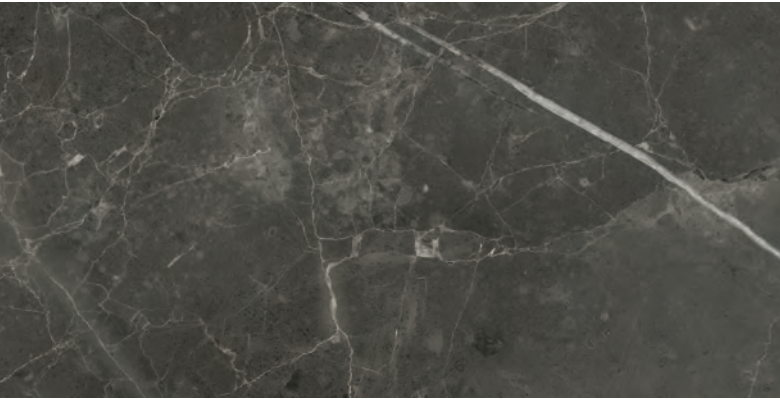

Carbon



Dune



Ivory




Onyx




Statuario

Formats at a glance



20 x 20
Matte




13 x 13
Matte



12 x 24
Matte

Mosaic



2 x 2
Matte

Lumino, *Calacatta*



20 x 20
Matte: BFP2020LMCA



13 x 13
Matte: BFP1313LMCA



12 x 24
Matte: BFP1224LMCA


Mosaic




2 x 2 Mosaic
Matte: BFP22LMCA




Lumino, *Carbon*

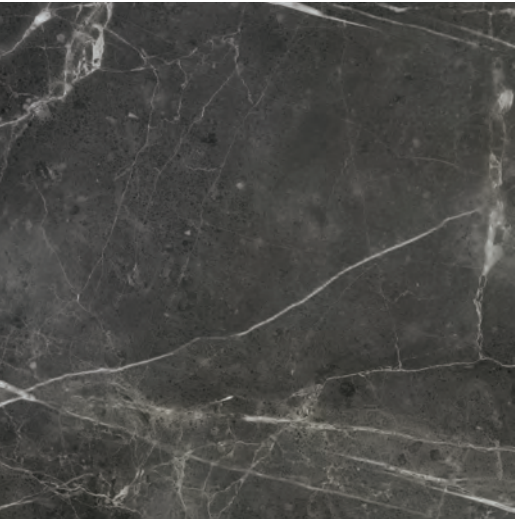

20 x 20
Matte: BFP2020LMC




13 x 13
Matte: BFP1313LMC

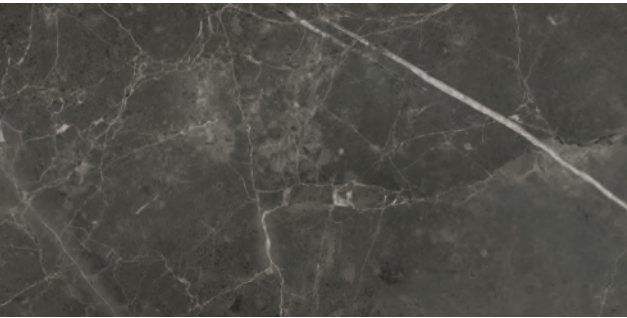


12 x 24
Matte: BFP1224LMC

Mosaic



2 x 2 Mosaic
Matte: BFP22LMC

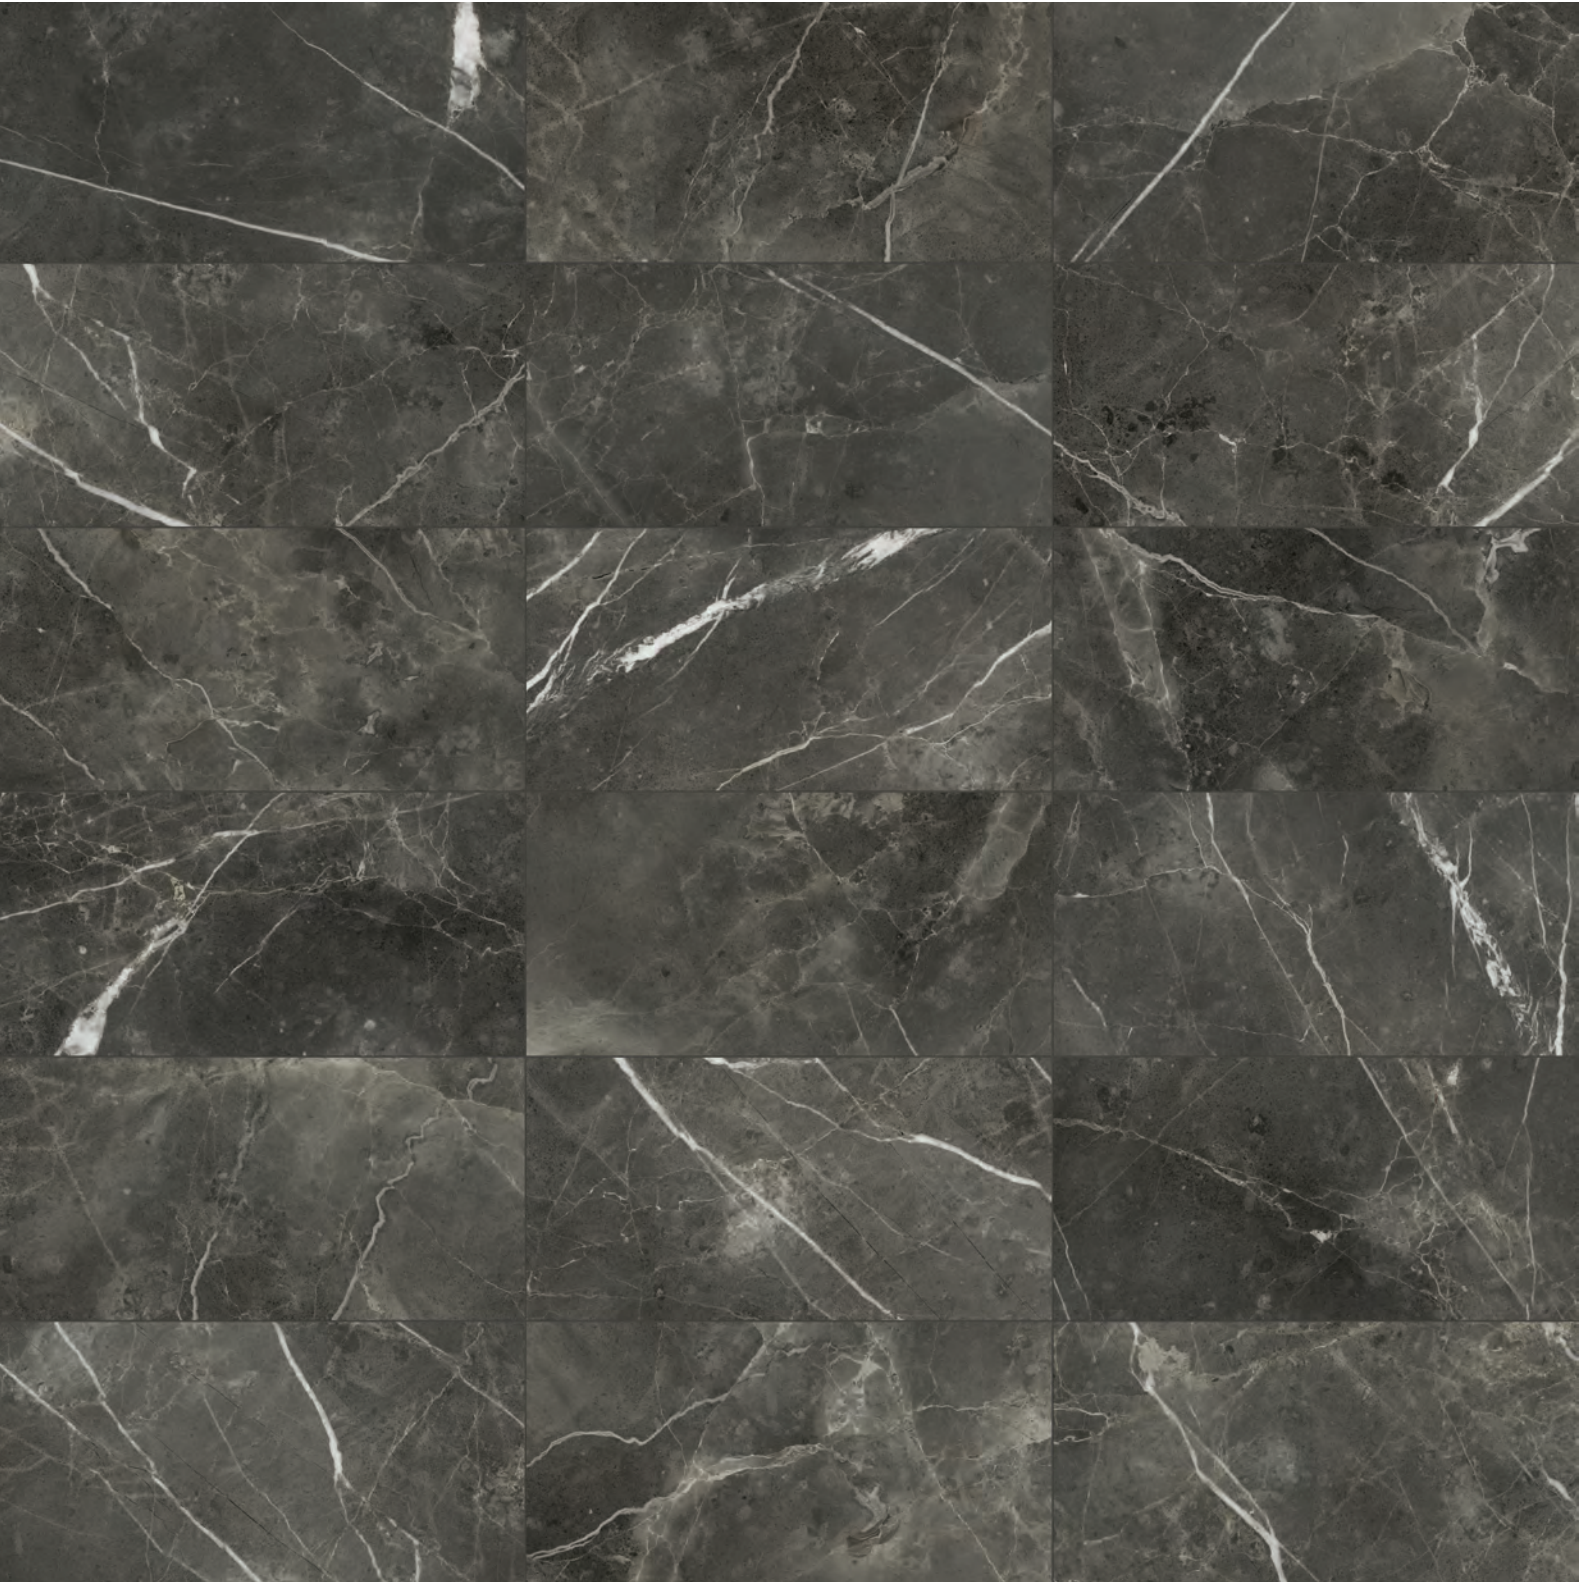

Lumino, *Dune*



20 x 20
Matte: BFP2020LMD



13 x 13
Matte: BFP1313LMD



12 x 24
Matte: BFP1224LMD

Mosaic



2 x 2 Mosaic
Matte: BFP22LMD



Lumino, *Ivory*



20 x 20
Matte: BFP2020LMI



13 x 13
Matte: BFP1313LMI



12 x 24
Matte: BFP1224LMI

Mosaic




2 x 2 Mosaic
Matte: BFP22LMI





20 x 20
Matte: BFP2020LMO



13 x 13
Matte: BFP1313LMO



12 x 24
Matte: BFP1224LMO

Mosaic



2 x 2 Mosaic
Matte: BFP22LMO





20 x 20
Matte: BFP2020LMS



13 x 13
Matte: BFP1313LMS




12 x 24
Matte: BFP1224LMS

Mosaic



2 x 2 Mosaic
Matte: BFP22LMS

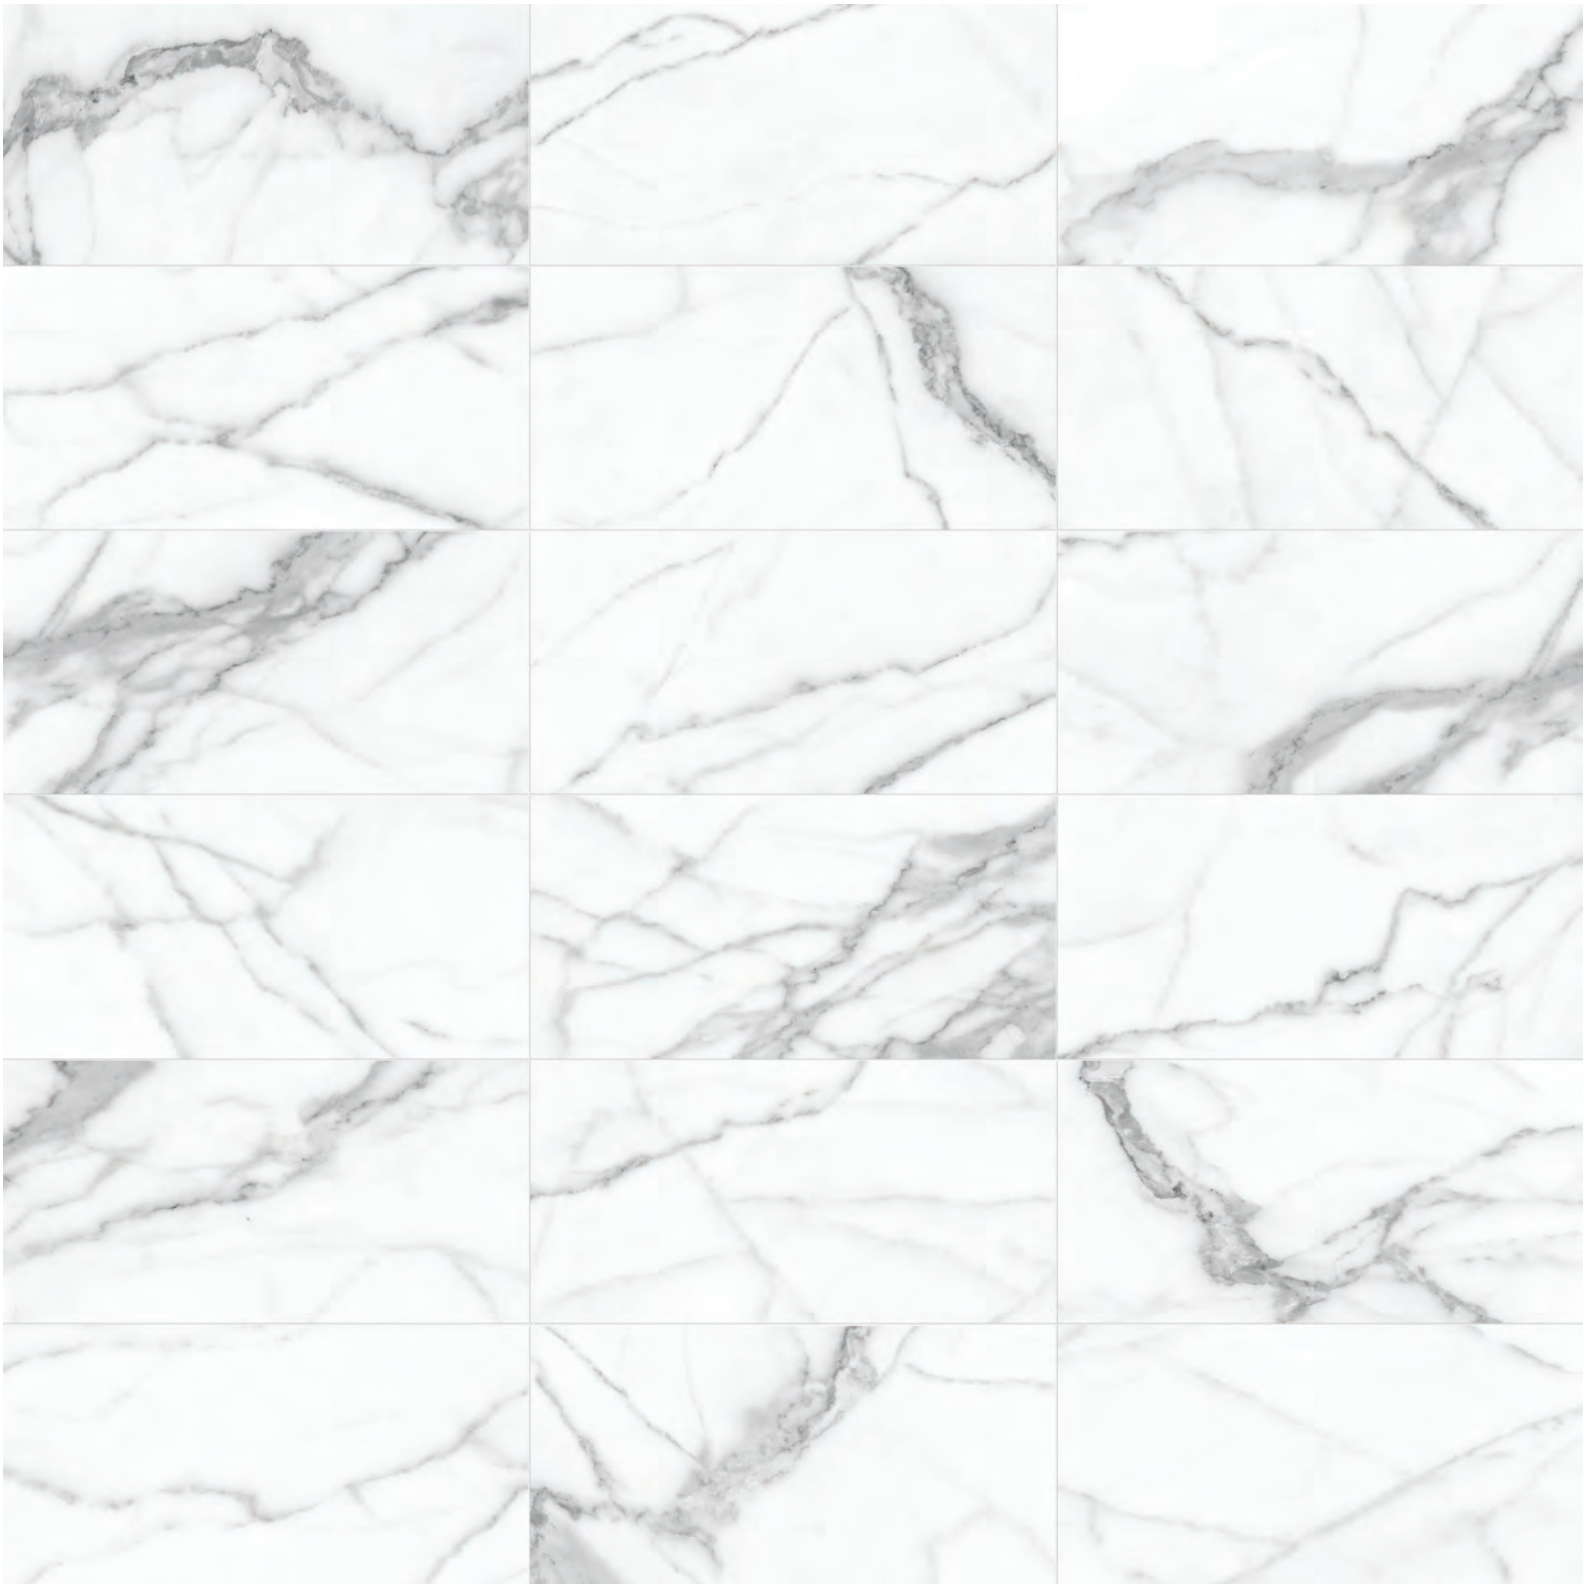

Packaging information

Key logistical details including item codes and product specifications.

Lumino Product & Packaging Information																		
	ACTUAL DIMENSIONS	THICKNESS	ONYX ITEM CODE	BIANCO ITEM CODE	STATUARIO ITEM CODE	CALACATTA ITEM CODE	IVORY ITEM CODE	DUNE ITEM CODE	GRIGIO ITEM CODE	CARBON ITEM CODE	LBS BOX	KGS BOX	PCS BOX	SQFT BOX	M² BOX	BXS SKID	SQFT SKID	M² SKID
20 x 20 in / 50 x 50 cm LUMINO PRESSED GLAZED PORCELAIN TILE	497 x 497 mm	8.5 mm	4500-1078-0	4500-1076-0	4500-1072-0	4500-1073-0	4500-1075-0	4500-1079-0	4500-1074-0	4500-1077-0	63.55	28.83	6	15.93	1.48	24	382.32	35.52
13 x 13 in / 33 x 33 cm LUMINO MATTE PRESSED GLAZED PORCELAIN TILE	330 x 330 mm	7.6 mm	4500-1070-0	4500-1068-0	4500-1064-0	4500-1065-0	4500-1067-0	4500-1071-0	4500-1066-0	4500-1069-0	44.97	20.40	11	12.92	1.2	54	697.68	64.80
12 x 24 in / 30 x 60 cm LUMINO MATTE PRESSED GLAZED PORCELAIN TILE	300 x 600 mm	8.4 mm	4500-1054-0	4500-1052-0	4500-1024-0	4500-1049-0	4500-1051-0	4500-1055-0	4500-1050-0	4500-1053-0	59.45	26.97	8	15.5	1.44	32	496	46.08
MOSAIC																		
2 x 2 in / 5 x 5 cm LUMINO MATTE GLAZED PORCELAIN MOSAIC	299 x 299 mm	8.4 mm	4501-0581-0	4501-0579-0	4501-0575-0	4501-0576-0	4501-0578-0	4501-0582-0	4501-0577-0	4501-0580-0	38.44	17.44	10	9.58	0.89	45	431.1	40.05

Technical information

Tile collection performance based on industry standards.

Technical Information			
	WATER ABSORPTION	ANSI / ISO - (%)	< 0.5 %
	ABRASION RESISTANCE	ANSI / ISO	CLASS 4
	SCRATCH HARDNESS	ANSI / ISO - (Mohs)	MATTE 8
	BREAKING STRENGTH	ANSI - (ISO - (N))	
	SHADE VARIATION		V3
	SLIP RESISTANCE	ANSI - DCOF R11 VALUE	≥ 0.55
	CHEMICAL RESISTANCE	ANSI / ISO	CLASS A
	STAIN RESISTANCE	ANSI ISO	CLASS 5
	FROST RESISTANCE	ANSI / ISO	PASS

Test values are based on ANSI / ISO standards according to: ANSI A137.1 - Porcelain tile P1 Class, ISO 13006 - G - Bia Group, En 14411 - G - Bia Group. Variances in test values can occur in different production lots.

Usage recommendations

Usage Recommendations**		MATTE PORCELAIN	
APPLICATION		WAL L	FLOO R
INTERIOR	RESIDENTIA L	•	ID, IW, IW+, EW*, O/ G*
	COMMERCIA L	•	ID, IW, IW+, EW*, O/ G*
	HEAVY COMMERCIAL	•	
EXTERIOR R	RESIDENTIAL / COMMERCIAL	•	ID, IW, IW+, EW*, O/ G*

** These recommendations are not defined by ANSI/ISO standards.

DCOF Classifications per ANSI A326.3: (ID): Interior, Dry (IW): Interior, Wet (IW+): Interior, Wet Plus (EW): Exterior, Wet (O/G): Oils/Greases

* Factors other than the noted DCOF result must also be taken into consideration. Such factors include, but are not limited to, expected contaminants, drainage, surface texture, effect of structure on the DCOF measurement, number of grout joints, traction-enhancing features, and intended use in addition to the other criteria noted in standard ANSI A326.3

