


Zera Annex, Color Body Porcelain.

Woven charm: a fabric inspired design with a dynamic pattern and neutral tones.



12 x 24 in / 30 x 60 cm Rectified Matte

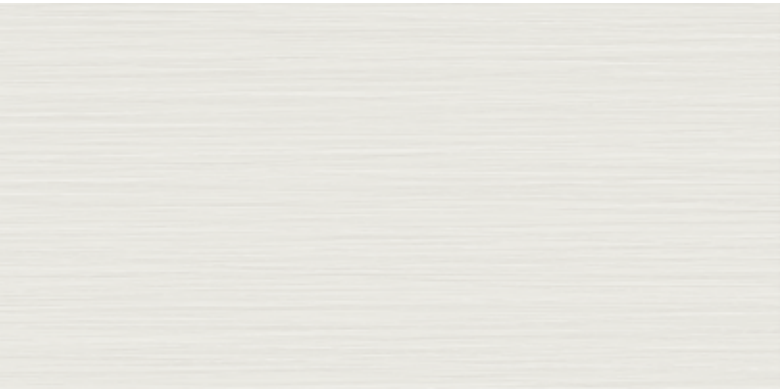

Bianco | BFC1224ZB



Carbon | BFC1224ZC



Olive | BFC1224ZOL



Oyster | BFC1224ZOY



Silver | BFC1224ZSI



12 x 24 in / 30 x 60 cm Zera Annex Carbon Matte Rectified Color Body Porcelain Tile



Packaging information

Key logistical details including item codes and product specifications.

Zera Annex Product & Packaging Information															
	ACTUAL DIMENSIONS	THICKNESS	BIANCO ITEM CODE	CARBON ITEM CODE	OLIVE ITEM CODE	OYSTER ITEM CODE	SILVER ITEM CODE	LBS BOX	KGS BOX	PCS BOX	SOFT BOX	M² BOX	BXS SKID	SOFT SKID	M² SKID
12 x 24 in / 30 x 60 cm ZERA ANNEX MATTE RECTIFIED COLOR BODY PORCELAIN TILE	300 x 600 mm	9 mm	4500-0712-1	4500-0714-1	4500-0715-1	4500-0716-1	4500-0718-1	64.06	29.06	8	15.5	1.44	32	496	46.08
MOSAICS															
2 x 2 in / 5 x 5 cm ZERA ANNEX MATTE COLOR BODY PORCELAIN MOSAIC	298 x 298 mm	9 mm	4501-0302-1	4501-0304-1	4501-0306-1	4501-0308-1	4501-0312-1	41.24	18.71	10	9.58	0.89	45	431.1	40.05
1 x 6 in / 2.5 x 15 cm ZERA ANNEX STACKED MATTE COLOR BODY PORCELAIN MOSAIC	298 x 298 mm	9 mm	4501-0301-1	4501-0303-1	4501-0305-1	4501-0307-1	4501-0311-1	41.11	18.65	10	9.58	0.89	45	431.1	40.05
TRIM															
3 x 24 in / 7.1 x 60 cm ZERA ANNEX MATTE COLOR BODY PORCELAIN BULLNOSE	71 x 600 mm	9 mm	4502-0259-1	4502-0260-1	4502-0261-1	4502-0262-1	4502-0264-1	41.8	18.96	20	N/A	N/A	56	1120 PCS	



Technical information

Tile collection performance based on industry standards.

Technical Information			
	WATER ABSORPTION	ANSI / ISO - (%)	≤0.1%T
	ABRASION RESISTANCE	ANSI / ISO	CLASS 4
	SCRATCH HARDNESS	ANSI / ISO - (Mohs)	7
	BREAKING STRENGTH	ANSI - (lbf) ISO - (N)	≥600 ≥2600
	SHADE VARIATION		V1
	SLIP RESISTANCE	ANSI - DCOF (WET) ISO - R VALUE	MATTE ≥0.50 MATTE R (-)
	CHEMICAL RESISTANCE	ANSI / ISO	CLASS A
	STAIN RESISTANCE	ANSI / ISO	CLASS A / CLASS 5
	FROST RESISTANCE	ANSI / ISO	PASS
Test values are based on ANSI / ISO standards according to: ANSI A137.1 - Porcelain tile P1 Class, ISO 13006 - G - Bia Group, En 14411 - G - Bia Group. Variances in test values can occur in different production lots.			

Usage recommendations

Anatolia's recommendations for suitable applications.

Usage Recommendations*			
		MATTE COLOR BODY PORCELAIN	
APPLICATION		WALL	FLOOR
INTERIOR	RESIDENTIAL	•	•
	COMMERCIAL	•	•
	HEAVY COMMERCIAL	•	
EXTERIOR	RESIDENTIAL / COMMERCIAL	•	

* These recommendations are not defined by ANSI/ISO standards.